


TWO LINE REMOTE DISPLAY

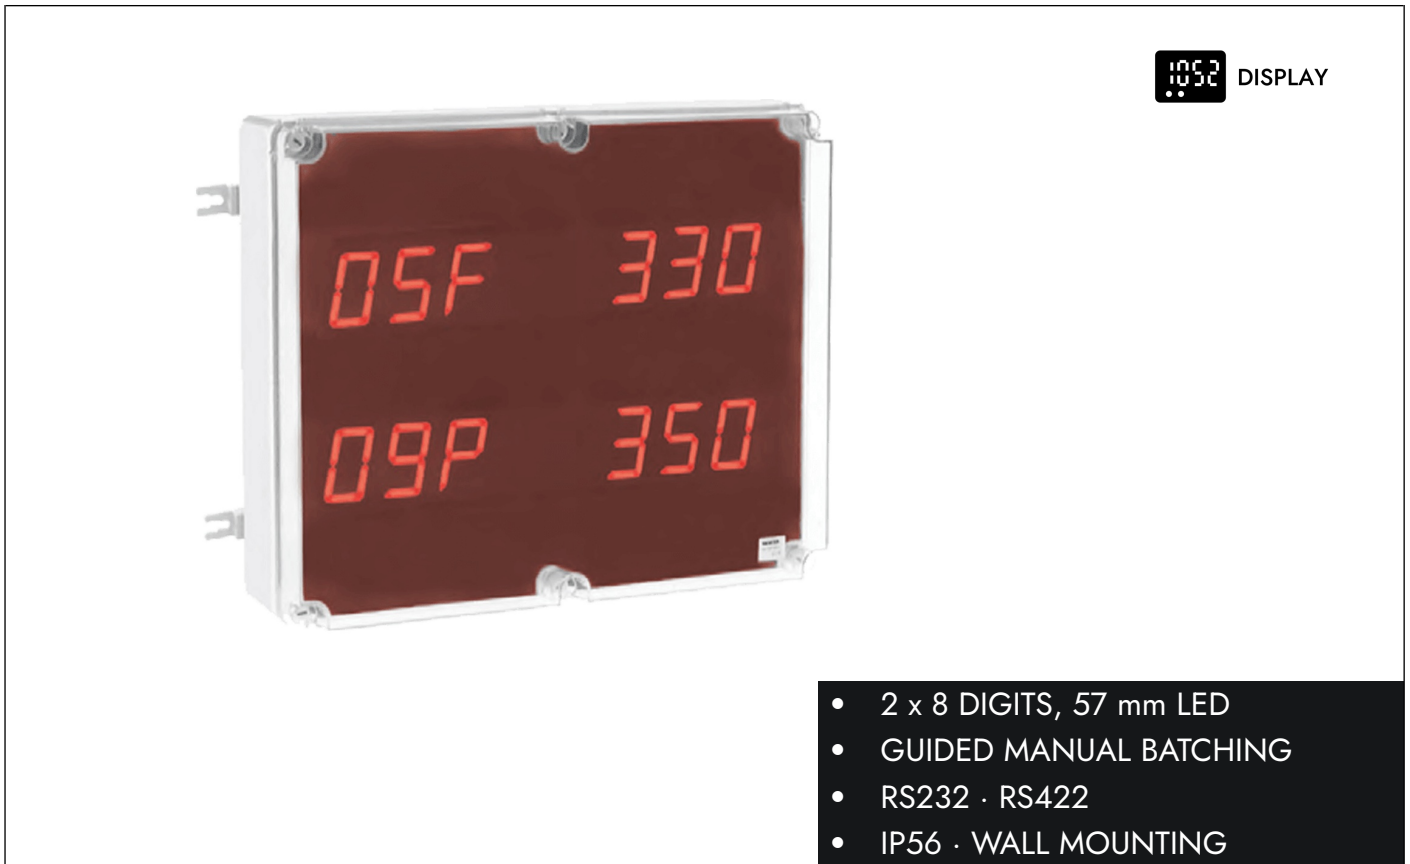

OVERVIEW

Two lines of eight red LED digits, 57 mm high, in a sealed plastic housing for wall mounting. The display guides an operator through manual batching: the upper line shows the number of the formula and the gross weight, the lower line shows the number of the product and the quantity still to be added, counting down to zero as the product goes in. The values come over RS232 or RS422 from a weight indicator of the WR series; IP56 makes the display fit for dusty plants and washdown areas.

DISPLAY

- 2 lines x 8 digits, red LED, 57 mm
- Semi-alphanumeric
- IP56 plastic housing

CONNECTION

- RS232 and RS422 serial ports
- 1 200 ... 57 600 bit/s
- 12 ... 24 V DC, 30 W



TECHNICAL DATA

DISPLAY

Lines	2
Digits per line	8
Digit height	57 mm
Type	semi-alphanumeric, red LED
Housing	plastic, for wall mounting

COMMUNICATION

Serial ports	RS232 · RS422
Baud rate	1 200 ... 57 600 bit/s, seven steps
Reads from	weight indicators, WR series

GUIDED MANUAL BATCHING

Upper line	formula number and gross weight
Lower line	product number and quantity
Quantity	counts down to zero while loading

POWER SUPPLY AND APPROVALS

Supply voltage	12 ... 24 V DC
Power consumption	30 W
CE	European Conformity marking
UKCA	equivalent of the CE marking, UK
Type	L-RIPDOSMANHA

ENVIRONMENT AND MECHANICS

Working temperature	-10 °C ... +40 °C
Storage temperature	-20 °C ... +50 °C
Humidity, condensate free	85 %
Protection	IP56
Dimensions	468 x 390 x 130 mm · see drawing
Mounting	4 x Ø 6 mm, 490 x 234 mm apart · wall



DIMENSIONS

