COMPRESSION JOINT

COMPRESSION



- STAINLESS STEEL AND RUBBER

Stainless Steel


MAX STATIC LOAD

kg	N	Thread	Net weight (kg)	For load cells
500	5 000	M8x1.25	0.04	LBLD

DESCRIPTION AND APPLICATION


DESCRIPTION

- Stainless steel and rubber compression joints to compensate for any misalignments of the support plates.
- Can be used for systems with at least 3 supports.

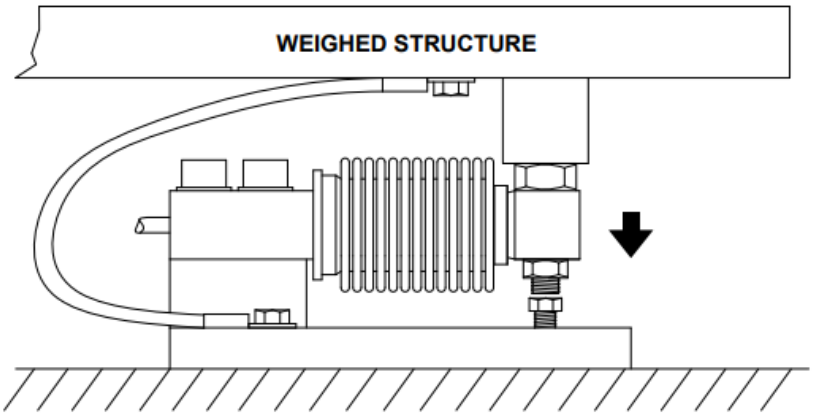

APPLICATION

- Tighten until it stops without forcing, to avoid damaging the rubber-coated joint.

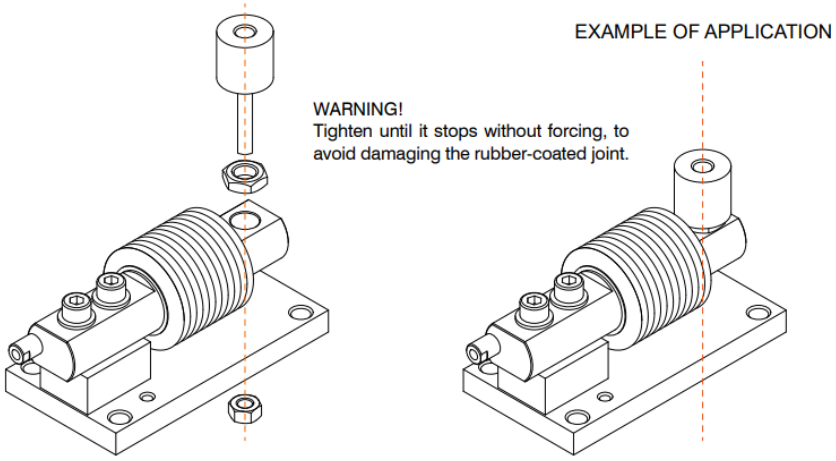

DIMENSIONS (mm)

