SELF-CENTERING JOINT FEET

TENSION & COMPRESSION



- UP TO 5 000 KG APPLICATION RANGE
- FOR BENDING BEAM AND SHEAR BEAM LOAD CELLS
- STAINLESS STEEL OR GALVANIZED STEEL

Stainless Steel **Galvanized Steel**

MAX STATIC LOAD

kg	Thread	Dimensions	Material	Net weight (kg)
500	M8	Ø60 x H 92 mm	stainless steel	0.3
500	M10	Ø60 x H 92 mm	stainless steel	0.3
2 000	M12	Ø60 x H 92 mm	stainless steel	0.4
5 000	M20	Ø80 x H 105 mm	stainless steel	0.9
2 000	M12	Ø62 x H 86 mm	galvanized steel	0.4
5 000	M20	Ø62 x H 110 mm	galvanized steel	0.9

Nuts and washers included.

DESCRIPTION AND APPLICATION


DESCRIPTION


- Self-centering joint feet for BENDING BEAM and SHEAR BEAM load cells.
- Nuts and washers included.



APPLICATION


EXAMPLE OF APPLICATION

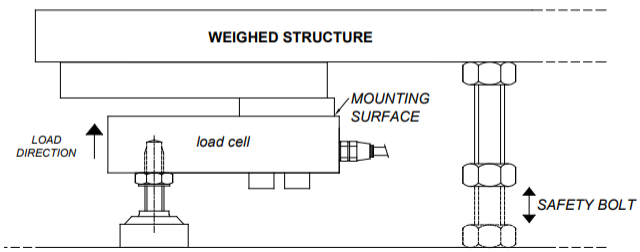

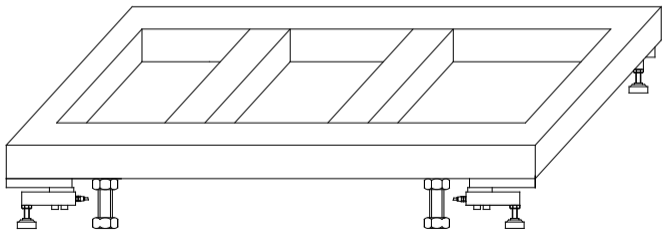


DIMENSIONS (mm)


stainless steel
M8x1.25

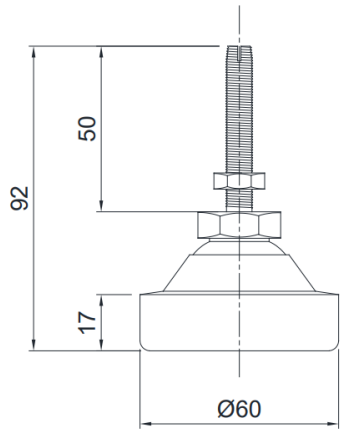


stainless steel
M10x1.5

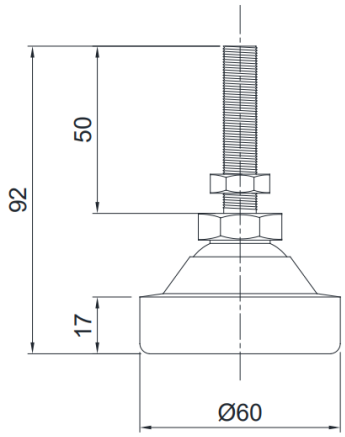


stainless steel
M12x1.75

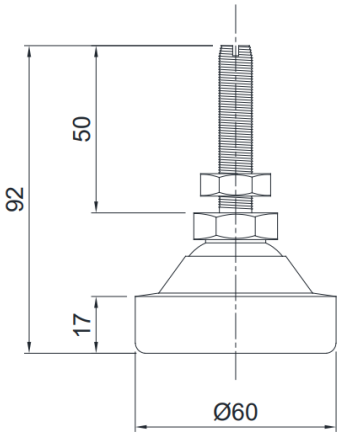

stainless steel
M20x2.5

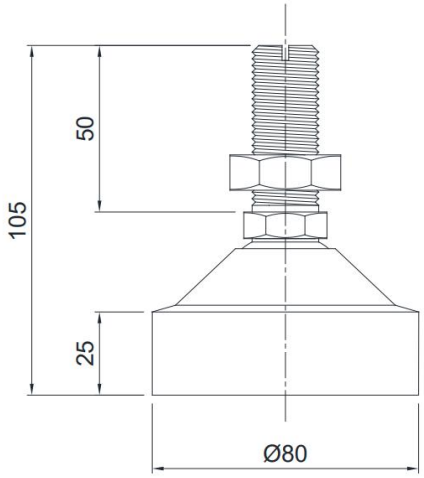

galvanized steel
M12x1.75

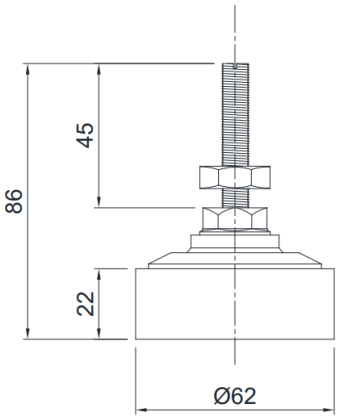

galvanized steel
M20x2.5

