

DIGITAL CRANE SCALE



- CAPACITY UP TO 300 KG
- REMOTE CONTROL UP TO 10 M
- IP54 PROTECTION RATING
- BATTERY OPERATION 80 H



IP54



Display

NOMINAL LOAD (FS)

kg	kN	Division (g)	Net weight (kg)
50	0.5	e = 10	1.2
150	1.5	e = 20	1.2
300	3	e = 50	1.2

Manufacturer type: LGLC.



TECHNICAL DATA

PRECISION

Accuracy class (% of full scale)	± 0.05 %
----------------------------------	----------

DESIGN

Housing	ABS
Attachment	upper swivel shackle, lower swivel hook
Display	5-digit backlit LCD, 20 mm height
Signalling symbols	4
Net weight	1.2 kg

MAIN FUNCTIONS

Zero setting	weight and tare weight
Reading division	adjustable
Units of measure	kg – lb
Power-off	automatic

MECHANICAL LIMITS

Safe overload	150 % of full scale
Ultimate overload	200 % of full scale

POWER SUPPLY

Batteries	4 × 1.5 V AA type, included
Operating time	80 h
Power-off	automatic

REMOTE CONTROL


Range	up to 10 m line of sight
-------	--------------------------

ENVIRONMENT

Humidity (condensate free)	10 ... 90 %
Working temperature	–10 ... +40 °C



DIMENSIONS (mm)

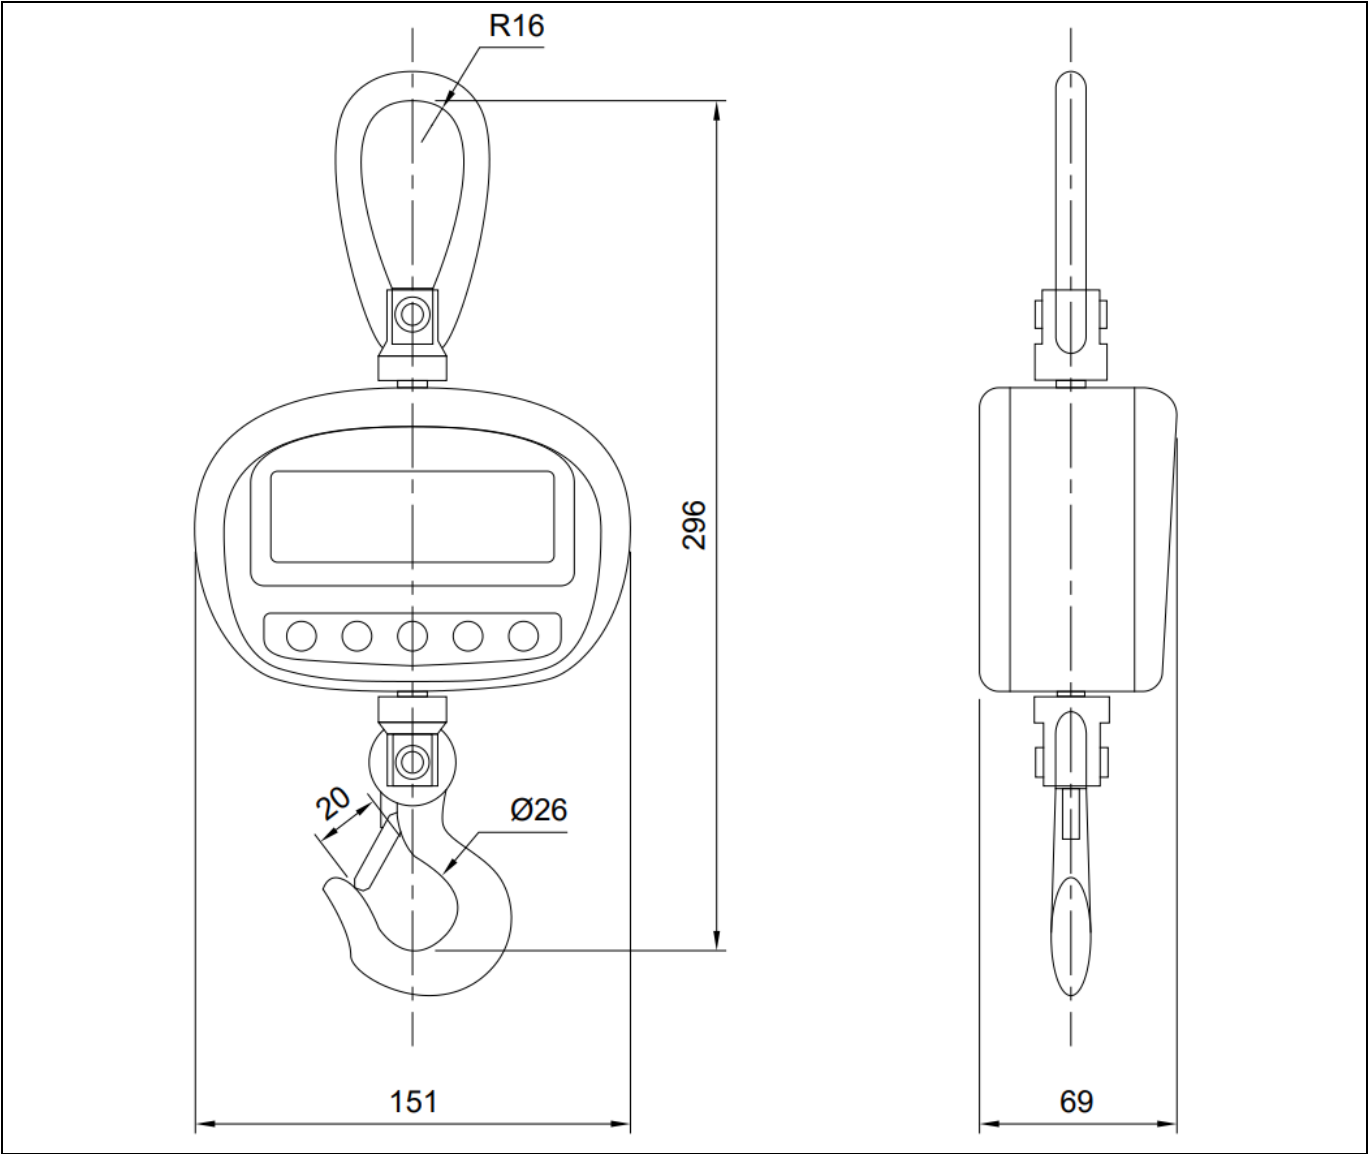

Dimensions in mm.

COMPLIANCE AND CERTIFICATION

Protection Rating	IP54
Compliance	CE
Calibration	Calibration report on request
Certifications	UK CA Equivalent of the CE marking for the United Kingdom

