

MOUNTING KIT FOR COMPRESSION - LOW PROFILE
LOAD CELLS



- AISI 304 STAINLESS STEEL
- UP TO 2 000 KG APPLICATION RANGE
- ADJUSTABLE HEIGHT



MAX STATIC LOAD

kg	N	Net weight (kg)	For load cells
2 000	20 000	0.6	LKLE


Load cell not included



DESCRIPTION AND MOUNTING

DESCRIPTION


- Adjustable upper plate in AISI 304 stainless steel (PPV).
- Constraint against lateral forces and anti-tilt by stainless steel self-centering joint foot.
- Compensation for any misalignments of the support plates of the structure.
- Adjustable height.
- * WARNING!
Max dimension to insert the bolt to allow the cell to perform properly

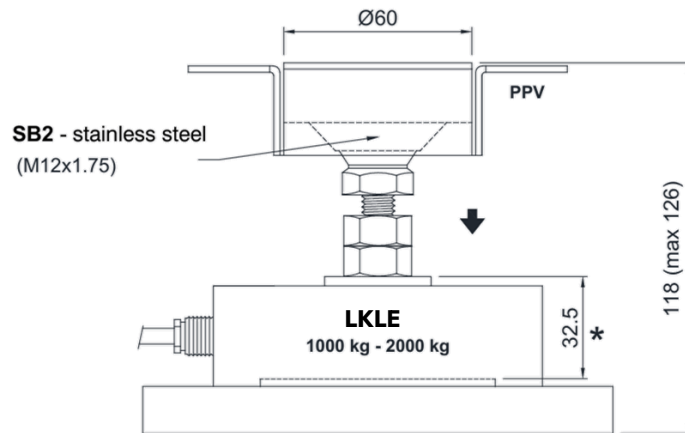


2 000 kg
20 kN

MOUNTING NOTES


- Finished the installation by means of a copper wire, connect the upper supporting plate with the lower supporting plate, then connect all the lower plates to the earthing system.
- In case of structure with four-point support, if one point does not touch the support base of the foot, you must proceed to adjust foot height.

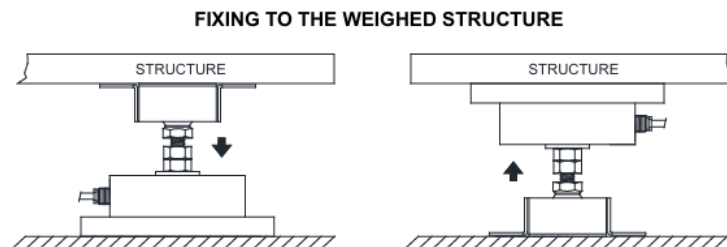

POSSIBLE UPPER PLATE POSITIONS

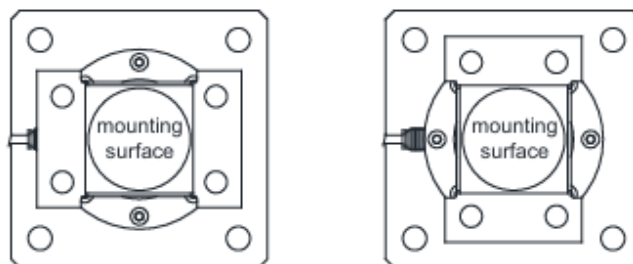


SB2 - stainless steel
(M12x1.75)

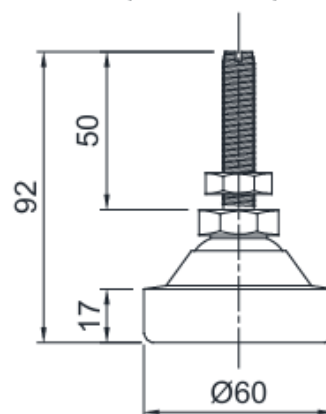


DIMENSIONS (mm)

LKLE

1000 kg - 2000 kg

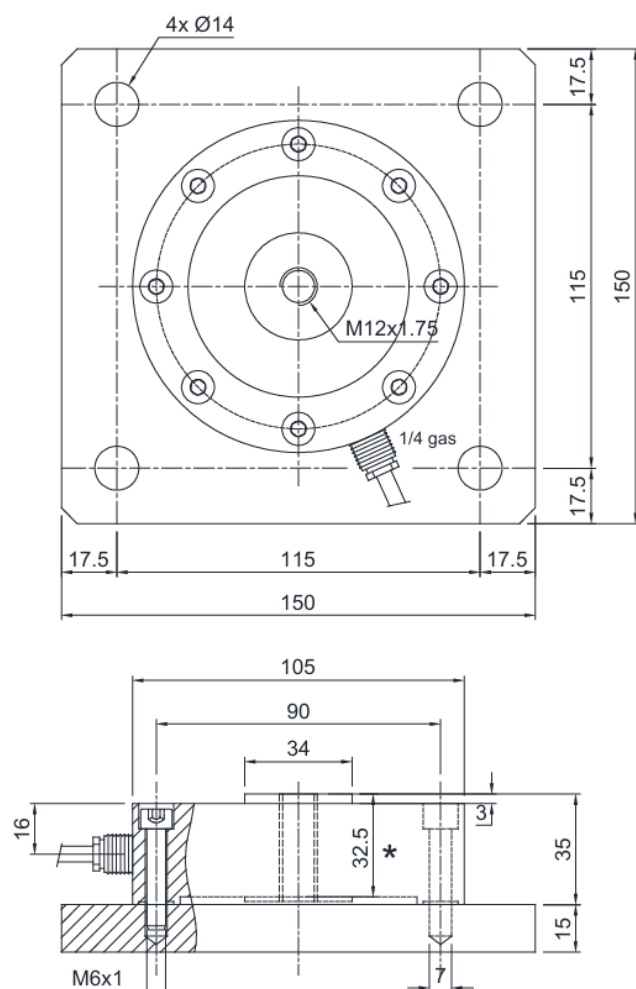

PPV

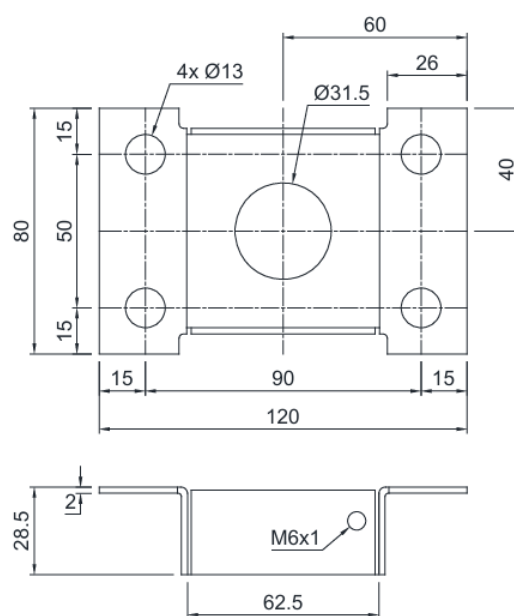

* WARNING!

Max dimension to insert the bolt to allow the cell to perform properly

