

MOUNTING KIT FOR COMPRESSION - LOW PROFILE
LOAD CELLS



- AISI 304 STAINLESS STEEL
- UP TO 2 000 KG APPLICATION RANGE
- ADJUSTABLE HEIGHT



MAX STATIC LOAD

kg	N	Net weight (kg)	For load cells
2 000	20 000	0.6	LKLE


Load cell not included



DESCRIPTION AND MOUNTING

DESCRIPTION

- Constraint against lateral forces and anti-tilt by AISI 304 stainless steel self-centering joint foot.
- Compensation for any misalignments of the support plates of the structure.
- Adjustable height.

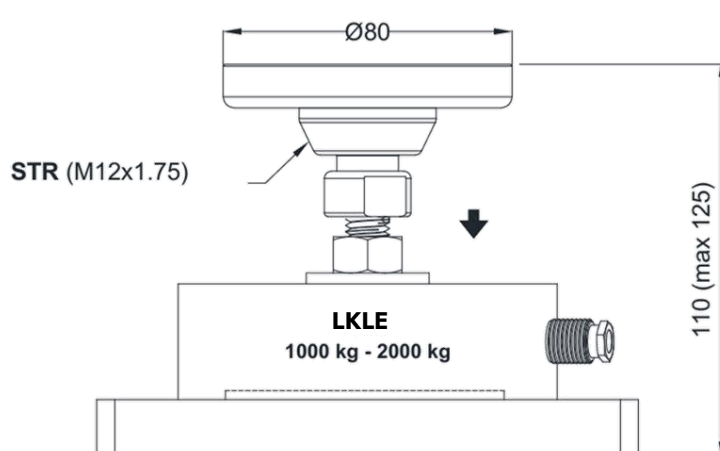


2 000 kg
20 kN


MOUNTING NOTES

- Finished the installation by means of a copper wire, connect the upper supporting plate with the lower supporting plate, then connect all the lower plates to the earthing system.
- In case of structure with four-point support, if one-point does not touch the support base of the foot, you must proceed to adjust foot height.

FIXING TO THE WEIGHED STRUCTURE

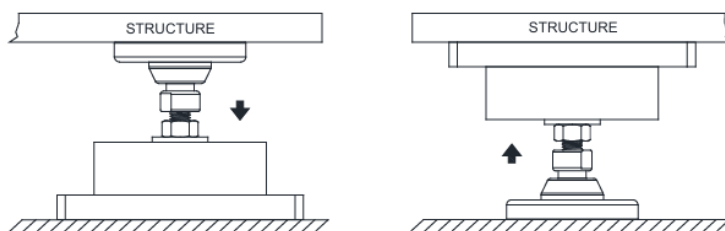

DIMENSIONS (mm)

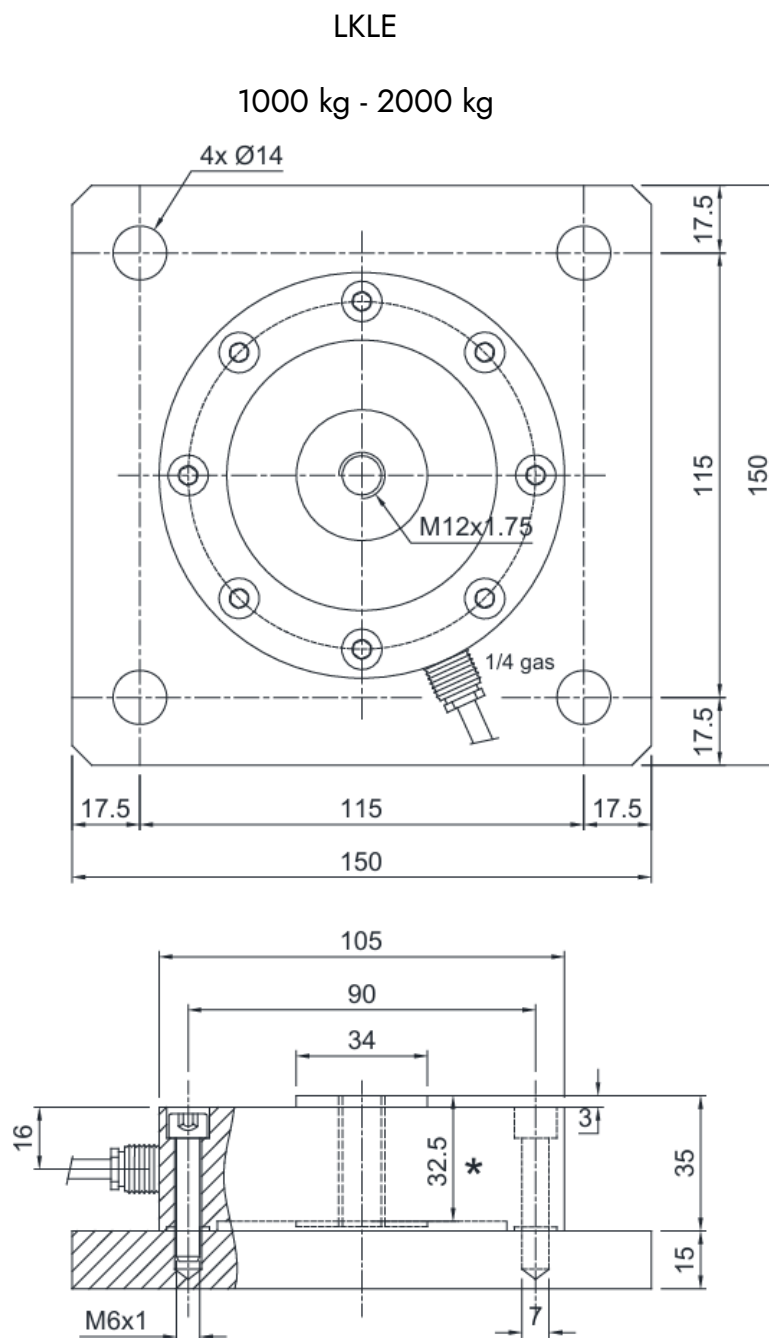

* WARNING!

Max dimension to insert the bolt to allow the cell to perform properly

