

PRICE COMPUTING SCALE WITH PRINTER



- CAPACITY 6 · 15 · 30 KG
- MULTIRANGE · OIML R76
- BUILT-IN THERMAL PRINTER
- BATTERY · 100 H OPERATING TIME



RS232



Display



Stainless Steel

CAPACITY

kg	Division e (g)	Net weight (kg)
3 / 6	1 / 2	8.6
6 / 15	2 / 5	8.6
15 / 30	5 / 10	8.6

Multirange scales, class III, 3000 divisions. Manufacturer type: BILPSTA.



TECHNICAL DATA

WEIGHING

Capacity (multirange)	3/6 · 6/15 · 15/30 kg
Linearity	< 0.01 % full scale
Display resolution	3000
Unit of measure	kg

DESIGN

Loading plate	Stainless steel
Display	backlit LCD on both sides, 4 × 6-digit (15 mm) and 1 × 18-digit (10 mm)
Printer	integrated thermal printer with real-time clock/calendar
Keyboard	50 keys, waterproof
Levelling	Bubble level and adjustable feet
Net weight	8.6 kg

TYPE-APPROVED INSTRUMENTS

Applied standards	2014/30/EU · EN 55022:2010 · EN 55024:2010 · EN 61000-3-2:2014 · EN 61000-3-3:2013
Operation mode	multi-interval
Accuracy class	III
Max. verification divisions	3000 (class III)

MAIN FUNCTIONS

Operators	Simultaneous management of 3 operators
Display	Simultaneous display of weight, unit price, amount, tare, date and time or customized message; amount per item and total amount
Prices	Price unit €/kg · €/100 g; preset tare; automatic cancellation of price and tare
Item memory	100 items (PLU) with name, code, price unit, unit sales price, unit purchase price, preset tare, stock; 56 PLU directly retrievable via keyboard
Selling	Items selling by number of pieces; automatic change calculation
Stock	Management of purchase prices and suppliers; automatic or manual loading of stocks
Printing	Amount per item, total amount and change; sales and purchase archives, stocks, under-stock items
Receipt	Non-fiscal: customizable header, date, time, operator number, item name, net weight, unit price, amount per item, total amount, change and customized message

INTERFACE

Serial port	RS232
Baud rate	600, 1200, 2400, 4800, 9600 bit/s

POWER SUPPLY


Power supply	100 ... 240 VAC
Internal battery	6 V, 10 Ah capacity
Operating time	100 h
Battery charger	external, 100 ... 240 VAC, included
Power-off	automatic

ENVIRONMENT

Humidity	< 85 %, condensate free
Storage temperature	-10 ... +50 °C
Working temperature	-10 ... +40 °C



DIMENSIONS (mm)

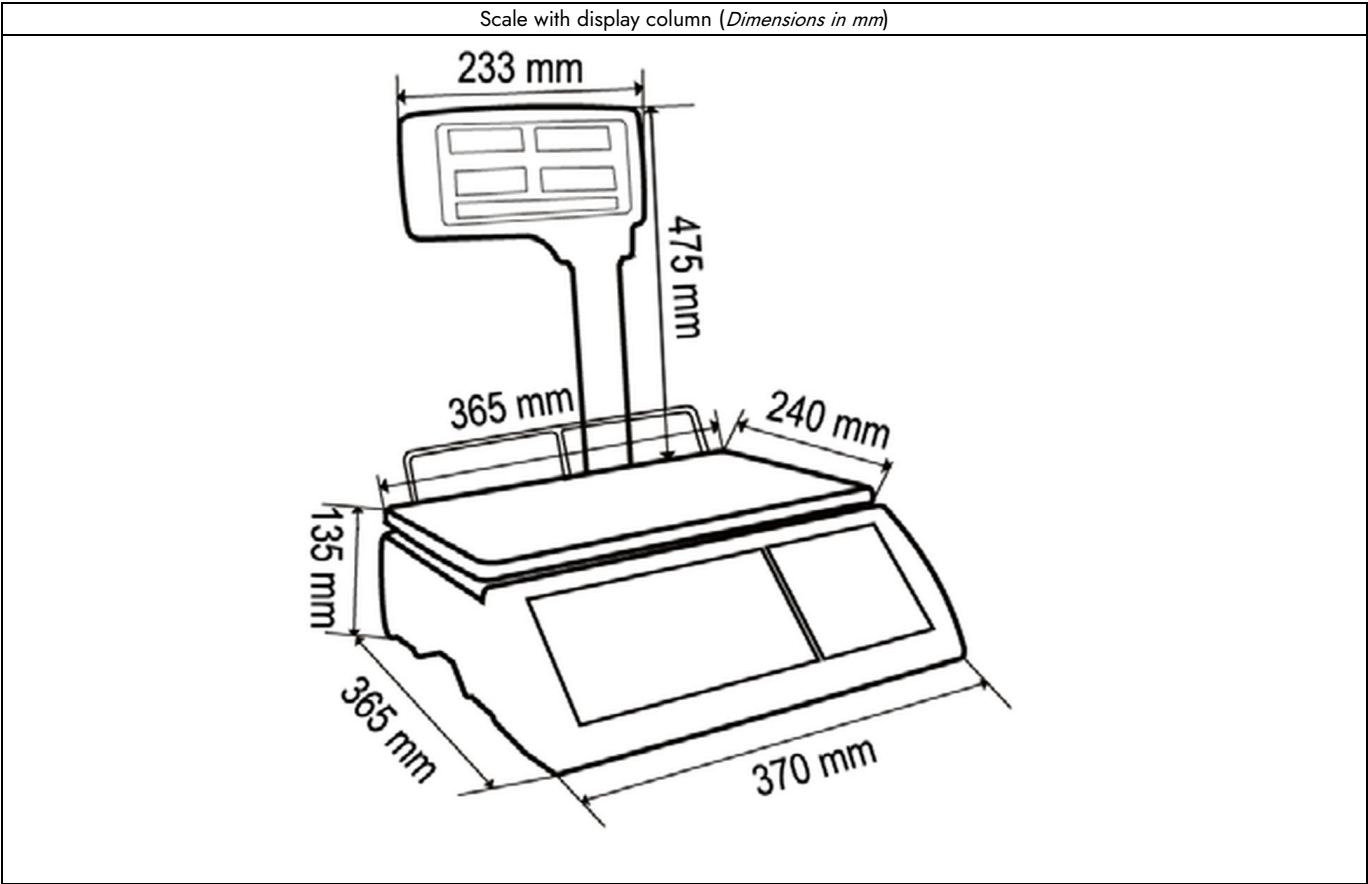

COMPLIANCE AND CERTIFICATION

Calibration	Calibration report on request
Compliance	CE
Certifications	 OIML R76:2006, class III, 3000 divisions
	 Equivalent of the CE marking for the United Kingdom
Certifications (on request)	 Conformity assessment (initial verification)



OPTIONS ON REQUEST

STAINLESS STEEL DEEP TRAY

- Stainless steel deep tray; dimensions: 240 × 340 × 40 mm.



ON REQUEST

RECHARGEABLE BATTERY

- Rechargeable battery 6 V, 10 Ah capacity.



ON REQUEST

THERMAL PAPER ROLL

- Thermal paper roll for weight/price/amount scales.



ON REQUEST

ADHESIVE PAPER ROLL

- Adhesive thermal paper roll.



ON REQUEST

