

COUNTING SCALE FOR REMOTE PLATFORM



- CAPACITY 6 · 15 · 30 KG
- REMOTE PLATFORM INPUT
- 3 × 6-DIGIT LCD · RS232
- 100 ITEMS (PLU) · BATTERY 70 H



UK
CA



RS232



Display



Stainless
Steel

CAPACITY

kg	Division e (g)	Net weight (kg)
6	0.1	4.8
15	0.2	4.8
30	0.5	4.8

Manufacturer type: LWLB.



TECHNICAL DATA

WEIGHING

Capacity	6 · 15 · 30 kg
Linearity	< 0.01 % full scale
Display resolution	60 000
Units of measure	g, kg

DESIGN

Loading plate	Stainless steel, 225 × 295 mm
Display	3 × 6-digit backlit LCD, 20 mm height
Keyboard	20 keys, waterproof
Levelling	Bubble level and adjustable feet
Net weight	4.8 kg

INTERFACES

Serial port	RS232, for PC or external printer
Baud rate	600, 1200, 2400, 4800, 9600 bit/s
Remote platform	input, 5-pin circular connector (included)
Connectable	single cell platforms LELA, LELC, LELD · 4 cells platforms LELE, LELF

POWER SUPPLY

Power supply	100 ... 240 VAC
Internal battery	6 V, 4 Ah capacity
Operating time	70 h
Battery charger	external, 100 ... 240 VAC, included
Power-off	automatic

ENVIRONMENT

Humidity	< 85 %, condensate free
Storage temperature	-10 ... +50 °C
Working temperature	0 ... +40 °C

MAIN FUNCTIONS

Piece counting	Simultaneous display of: number of pieces, average unit weight, total weight of the pieces on the scale
Item memory	100 storable items (PLU) with name, preset tare value and average unit weight
Totalization	Automatic / manual totalization of the weighings
Percentage	Weight indication as a percentage
Checking	Weight / pieces / percentage checking (HIGH / LOW) with acoustic and visual alarm
Receipt printing	Optional via the external thermal printer: customizable header, date, time, item name, scale ID, scale type, net weight, average unit weight, number of pieces on the scale, total weight, total number of pieces


APPLICATION



Connected to a remote weighing platform for weighing and counting of large quantities.



DIMENSIONS (mm)

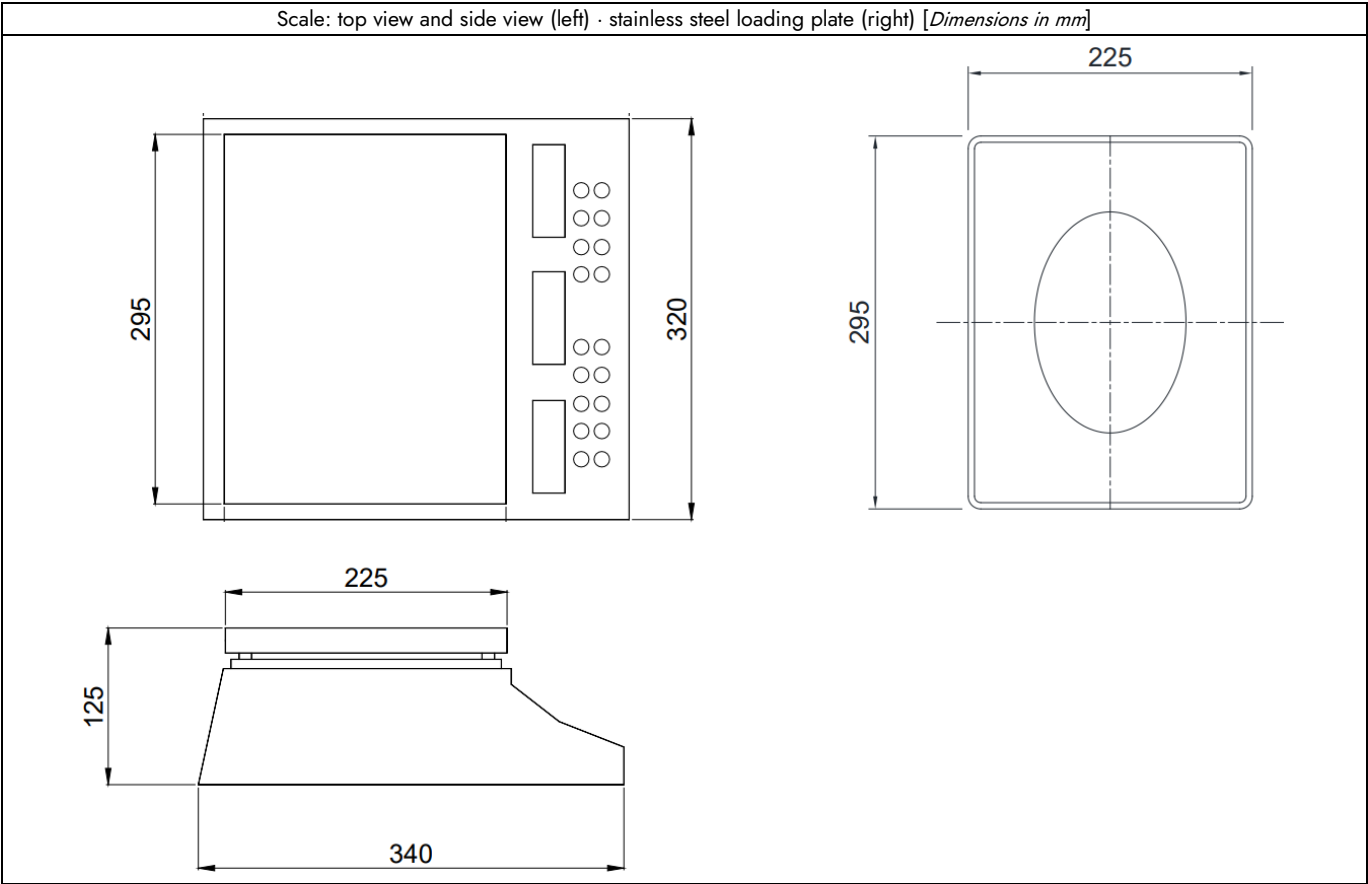

COMPLIANCE AND CERTIFICATION

Calibration	Calibration report on request	
Compliance	CE	
Certifications		Equivalent of the CE marking for the United Kingdom



OPTIONS ON REQUEST

STAINLESS STEEL DEEP TRAY

- Stainless steel deep tray; dimensions: 230 x 300 x 40 mm.



ON REQUEST

RECHARGEABLE BATTERY

- Rechargeable battery 6 V, 4.5 Ah capacity.



ON REQUEST

THERMAL PRINTER

- Desktop thermal printer.



ON REQUEST

